




## Specifications:

- Material
  - Low density polyethylene
  - Elongation to yield: 20%
  - Impact strength: 190 ft-lb
  - Tensile strength at yield: 2600 psi
- All Season Compatible
  - Temperature range: -40° F to 180° F
  - 10 year UV rated
- Portable
  - Weight per unit (empty): 55lbs
  - Weight per unit (filled): 650lbs
  - Units nest together for transportation
- Ground Pressure
  - Empty: 0.0333 psi
  - Filled: 0.3939 psi
- Dimensions
  - Minimum polyethylene thickness: 0.25"
  - Footprint on ground: 11.5 ft<sup>2</sup>
  - 6 ft. wide x 2 ft. deep x 2 ft. high
  - Installed in 6 ft. sections
  - Fit 256 units on one 48 ft. flatbed trailer

## 2 Foot System

# MUSCLEWALL®

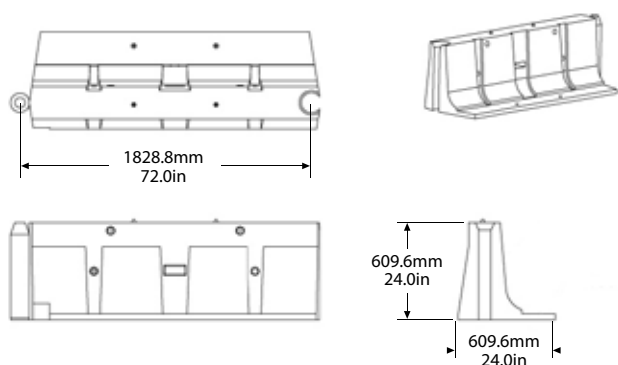

## Features:

- Walls interconnect
- Connection acts like a hinge allowing for 22° of motion
- Corner piece allows 90° turns
- Ratchet straps restrain adjacent panels
- Tongue and groove panel interface for easy staking
- Patent Protected
  - US 8.313.265 B2
  - USD 631977
  - US 634443

## Contact us:

Please contact us with any questions you have regarding Muscle Wall and how we can help you with your water management needs.

Email – [info@musclewall.com](mailto:info@musclewall.com)

Toll-free – 1.800. 801.8739

Fax – 435.514.6707

Mail – 675 North 600 West Suite 1

Logan, UT 84321

Web – [www.musclewall.com](http://www.musclewall.com)